

User manual GP47


"Square bench" (version 2015-01)

Latest version can always be found at www.govaplay.com

According to EN1176, this bed-bench is not considered as being a play equipment. Therefore, a TÜV-certificate is not required.

surface 130 x 130 cm seat = 30 cm (2 boards 4 x 15 cm with rounded edges)



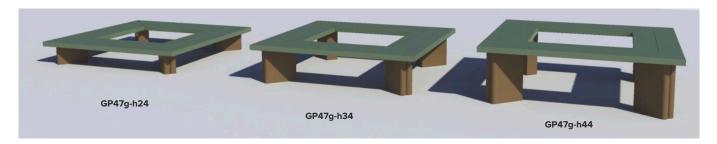

Material

- Solid planks made of recycled plastic (PE), coloured throughout.
- Stainless steel screws and nail plugs

Mounting

The bench is delivered in 4 pre-assembled parts

Maintenance

Maintenance of the recycled plastic material is very limited. Cleaning with a soapy water and a sponge or soft brush. Rinse with water to remove all dirt and soap. As the water absorption of the material is less than 0,29%, it will not get stained by oil, grease and other products. Besides, mosses and algae will have difficult to adhere to the material and are very easy to remove. Cleaning with high-pressure (max. 100 bar) is possible but is not recommended and mostly not needed. If anyway, then spray with a fan-shaped jet at minimum 30 cm from the plastic surface.

Painting or staining is useless as the paint will not stick attach to the material.

GP47b-h24 = height 24, beige boards GP47g-h24 = height 24, green boards +/- 54 kg

GP47b - h34 = height 34, beige boards GP47g - h34 = height 34, green boards +/-64 kg

GP47b – h44 = height 44, beige boards GP47g – h44 = height 44, green boards +/- 74 kg




Installation

The bench is delivered in 4 pre-assembled parts. Anchorage is possible but not required when permanent supervision of the playground is guaranteed.


No need for safety zone and safety surface

As this product is being considered as furniture there is no need to respect a safety zone. A safety surface is also not required.

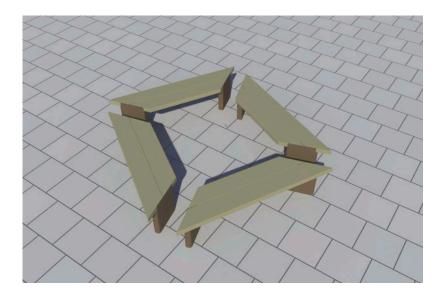

The bench legs are pre-drilled in order to assemble the complete bench.

Use a metal drill bit of 4 mm to pre-drill

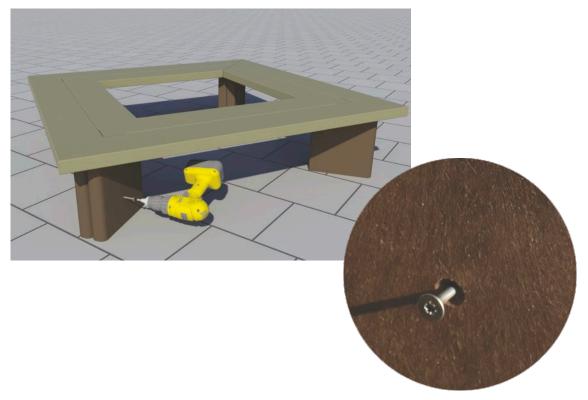

Vis Torx 25 en inox

Anchorage

Anchorage not required when supervision is guaranteed. Anchorage is done by fixing the brackets onto the bench legs and to fix them into the ground by means of the nail plugs. It is recommended to pre-drill with a wood or metal drill bit of 4 mm. The holes for the nail plugs need to be pre-drilled using a stone drill bit of 8 mm..

